

testo 905-T1, fast penetration/one-hand thermometer

testo 905-T1

testo 905-T1 is one of the fastest mini-thermometers, with a broad measuring range of -50 to +350 °C short-term (1-2 minutes) up to +500 °C. Especially in the higher measuring range, it has a

considerably better accuracy than most thermometers in this price class.

testo 905-T1


testo 905-T1: penetration thermometer incl. attachment clip, battery

Part no. 0560 9055


- Professional industrial sensor (thermocouple Type K)
- Large, fast display
- High temperature measurement, short-term up to 500 °C

| Accessories | Part no. |
|---|-----------|
| ISO calibration certificate/temperature, for air/immersion probes, calibration points -18°C; 0°C; +60°C | 0520 0001 |


| Technical data | |
|----------------------|--|
| Meas. range | -50 to +350 °C Short-term to +500 °C |
| Accuracy ±1 digit | ±1 °C (-50 to +99.9 °C) ±1% of mv (remaining range) |
| Resolution | 0.1 °C |
| Oper. temp. | 0 to +40 °C |
| Battery life | 1000 h |
| Storage temp. | -20 to +70 °C |



testo 905-T1: Immersion/penetration probe, Ø 3mm with pro sensor (thermocouple Type K)



The Testo original: sensor directly in the measurement tip
1=probe shaft, 2=sensor

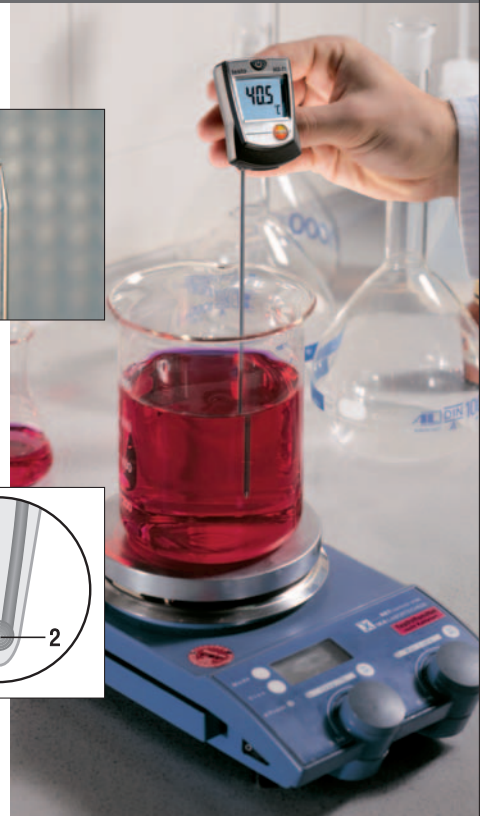

Application in a laboratory

testo 905-T2, fast surface thermometer

testo 905-T2

The surface thermometer in professional quality with sprung thermocouple measuring head, very fast reaction time and high accuracy.

- Very fast reaction time
- High accuracy
- Auto-Off function


testo 905-T2

testo 905-T2: surface thermometer with cross-band probe, incl. attachment clip, battery

Part no. 0560 9056

| Accessories | Part no. |
|--|-----------|
| ISO calibration certificate/temperature, meas. instr. with surface probe; calibration points +60°C; +120°C; +180°C | 0520 0071 |

| Technical data | |
|----------------------|---|
| Meas. range | -50 to +350 °C Short-term to +500 °C |
| Accuracy ±1 digit | ±(1 °C ±1% of mv) |
| Resolution | 0.1 °C |
| Oper. temp. | 0 to +40 °C |
| Battery life | 1000 h |
| Storage temp. | -20 to +70 °C |



testo 905-T2: sprung thermocouple cross-band Ø 12 mm adapts to any surface



Monitoring surface temperature in refrigeration systems

